



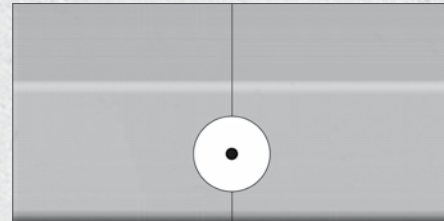

# CONCRETE UPSTAND

FOR DEEP BOXES

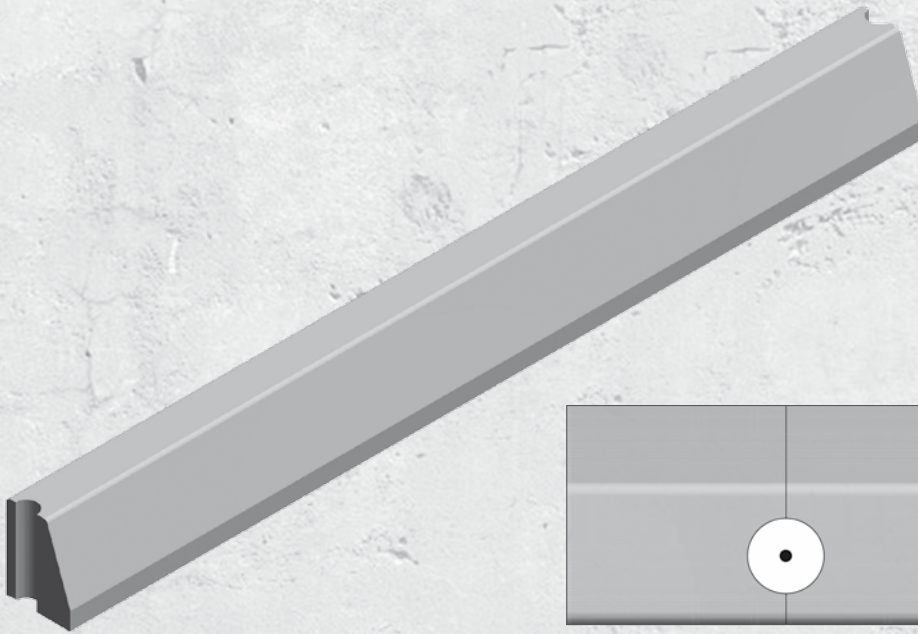

Detailed view: folded up concrete

- ▶ For rear and front upstand
- ▶ Height: 18 cm, 20 cm, 22 cm, 24 cm
- ▶ Easy to install
- ▶ Concrete strength: C 40/50
- ▶ No fastening with screws
- ▶ Concrete strength C 40/50

## CONCRETE UPSTAND


With the concrete upstand the company Thye-Lokenberg offers a steady, cost-effective and sustainable solution for the production in dairy cattle. To avoid claw damages and injuries to joints, the tops are rounded.

We offer this concrete upstand as a standard measure of 2.00 m length. The bottom width is 15 cm, the top tapering to 9.5 cm. To be able to react flexibly to given stable equipment, we offer the following different heights: 18 cm, 20 cm, 22 cm, 24 cm.




## INSTALLATION INSTRUCTIONS


- 1st. Get first element in position.
- 2nd. Drill a hole (with an 8 mm masonry drill), with a depth of approximately 10 cm.
- 3rd. An approx. 25 cm long iron rod made of V2A stainless steel hit the borehole
- 4th. Put concrete upstands together and on Glue the floor with tile adhesive
- 5th. Fill cavity with cement mortar

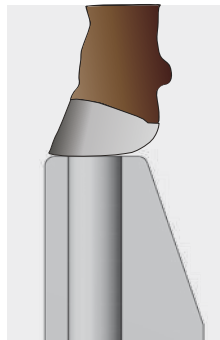

Side view

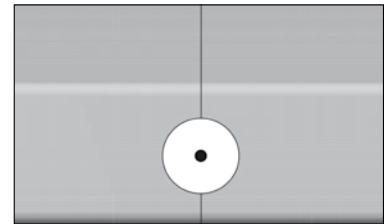

Detailed view: folded up concrete

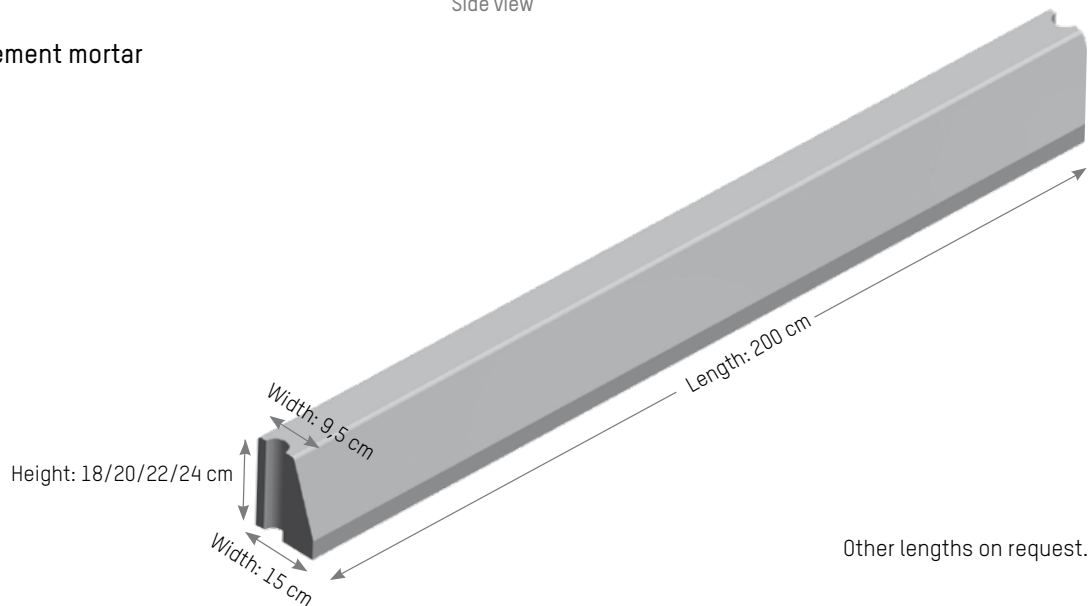

Other lengths on request.

The illustrations may differ from the actual version.  
Subject to technical changes.

Manufactured according to the requirements of DIN EN 12737



Thye-Lokenberg Betonwerke GmbH  
Erlenweg 4  
D-49434 Neuenkirchen-Vörden  
Phone +49 5493 - 99219-0  
Fax +49 5493 - 99219-20  
[info@thye-lokenberg.de](mailto:info@thye-lokenberg.de)

Thye-Lokenberg Polska Sp. z o.o.  
ul. Osiedlowa 27  
PL 68-114 Tomaszowo  
Phone +48 68 3606-199  
Fax +48 68 3606-398  
[thye@thye-lokenberg.pl](mailto:thye@thye-lokenberg.pl)

[www.thye-lokenberg.com](http://www.thye-lokenberg.com)