




**thye-lokenberg**

Phone +49 5493 99 21 90  
info@thye-lokenberg.de



## PIGLET-SLATTED FLOOR

1.3 CM FOR PIGLETS

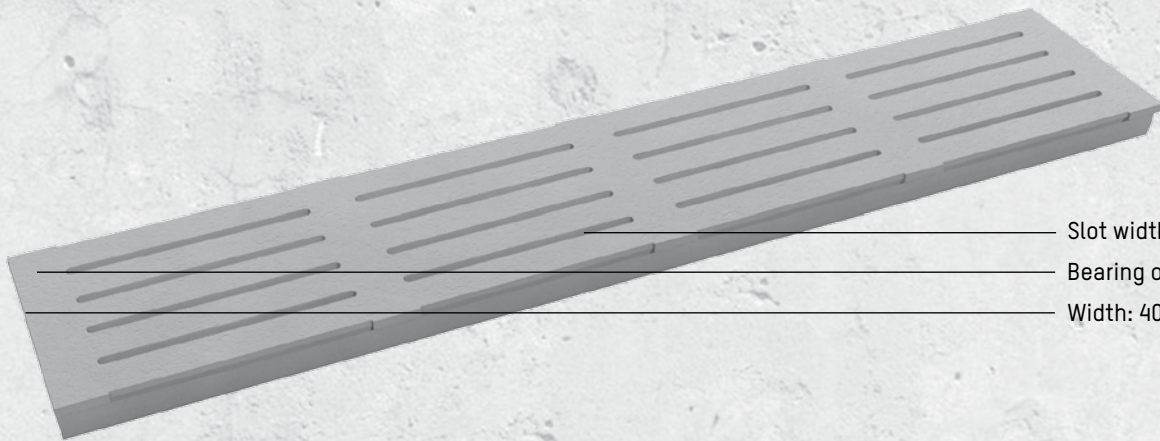

Slot width: 1.3 cm

Bearing outside: 8 cm

Width: 40 cm

- ▶ 1.3 cm slot width according to the German „Haltungsverordnung“
- ▶ Optimum cleanliness by increased slot share
- ▶ Animal weight up to 60 kg
- ▶ Concrete quality: C 40/50 calculated according to DIN EN 12737
- ▶ High maturity and stability due to
- ▶ Pet-friendly interface
- ▶ Good self-cleaning due to optimum excrement tear-off edge
- ▶ Standardly machine-deburred slot edges

## PIGLET-SLATTED FLOOR

This slatted floor model is especially geared to the needs of rearing piglets. A fine-tuned slot arrangement in combination with the balanced tread area is perfect for the stability and security of the sensitive animals.

The standardized excrement tear-off edge promotes the smooth passage of excrements through the slot.


Piglet slatted floors can be combined if necessary with metal or plastic slats. This creates a significant difference in height, which is compensated by special joists (available up to a length con 3 m).

## SIZES:

Length in m	Width cm	Height cm	Tread cm	Weight kg/m <sup>2</sup>	Piece Weight	Number cross plank
0.80	40	7	6.7	120	36	2
0.90	40	7	6.7	120	41	3
1.00	40	7	6.7	120	46	3
1.10	40	7	6.7	120	50	3
1.20	40	7	6.7	120	55	4
1.30	40	7	6.7	120	60	4
1.40	40	7	6.7	120	63	4
1.50	40	7	6.7	120	70	4
1.60	40	7	6.7	120	74	5
1.70	40	7	6.7	120	78	5
1.80	40	8	6.7	138	90	5
1.90	40	8	6.7	138	95	5
2.00	40	8	6.7	138	115	5
2.10	40	9	6.7	156	121	5
2.20	40	9	6.7	156	127	6
2.30	40	9	6.7	156	133	6
2.40	40	9	6.7	156	139	6
2.50	40	10	6.7	170	170	6
2.60	40	10	6.7	170	177	6
2.70	40	10	6.7	170	184	7
2.80	40	11	6.7	175	206	7
2.90	40	11	6.7	175	213	7
3.00	40	11	6.7	175	220	7

Also available in 42 cm width.

Also available in part closed.

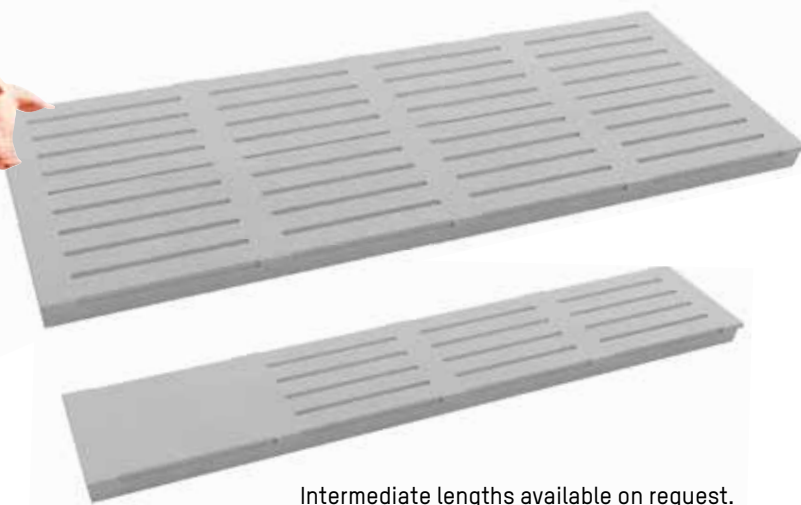

Intermediate lengths available on request.

The illustrations may differ from the actual version.  
Subject to technical changes.

Manufactured according to the requirements of DIN EN 12737



**Thye-Lokenberg Betonwerke GmbH**  
Erlenweg 4  
D-49434 Neuenkirchen-Vörden  
Phone +49 5493 - 99219-0  
Fax +49 5493 - 99219-20  
[info@thye-lokenberg.de](mailto:info@thye-lokenberg.de)

**Thye-Lokenberg Polska Sp. z o.o.**  
ul. Osiedlowa 27  
PL 68-114 Tomaszowo  
Phone +48 68 3606-199  
Fax +48 68 3606-398  
[thye@thye-lokenberg.pl](mailto:thye@thye-lokenberg.pl)

[www.thye-lokenberg.com](http://www.thye-lokenberg.com)