




CLOSED CONCRETE PLATES FOR PIGS

Width: 60/120 cm

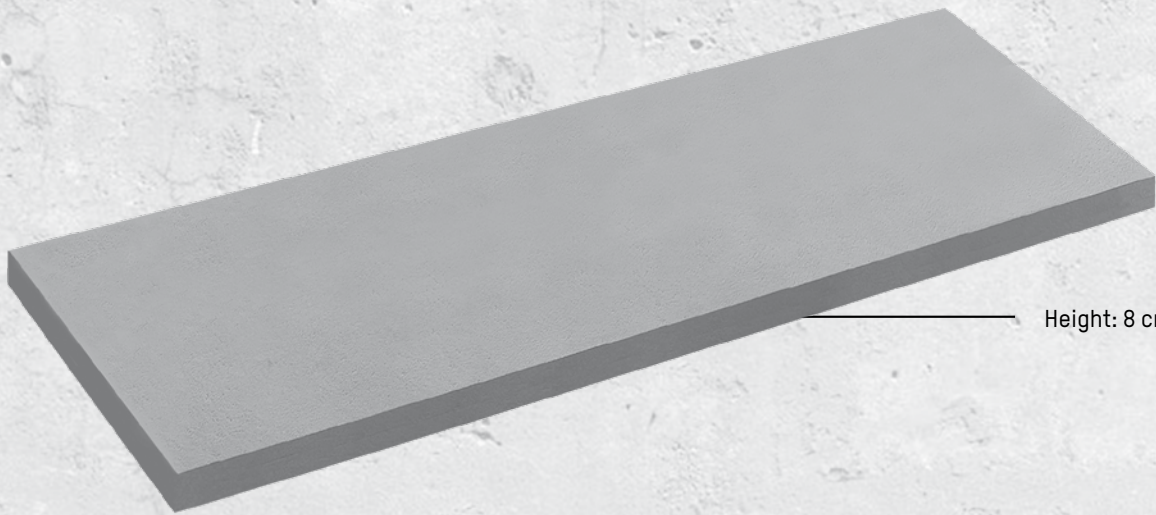

Height: 8 cm or 10 cm

- ▶ Animal weight up to 250 kg
- ▶ Can be combined with other slatted floors (same height)
- ▶ Bearing at least 8 cm
- ▶ Concrete quality: C 40/50
- ▶ Manufactured according to the requirements of DIN EN 12737
- ▶ Available in different widths

CLOSED CONCRETE PLATES FOR PIGS

The closed concrete plates for pigs are optimal combinable with other slatted floors and are strained up to 250 kg animal weight.

The closed concrete plates have a high maturity and stability, granted by the animal-friendly surface. Standard widths are 60 cm or 120 cm, other widths on request.

SIZES:

Length in m	Width: 60 cm				Width: 120 cm			
	Weight in kg/piece Height: 8 cm	Weight in kg/m ² Height: 8 cm	Weight in kg/piece Height: 10 cm	Weight in kg/m ² Height: 10 cm	Weight in kg/piece Height: 8 cm	Weight in kg/m ² Height: 8 cm	Weight in kg/piece Height: 10 cm	Weight in kg/m ² Height: 10 cm
0.60	63	176	84	233	127	176	168	233
0.70	74	176	98	233	148	176	196	233
0.80	84	176	98	233	169	176	224	233
0.90	95	176	126	233	190	176	252	233
1.00	106	176	140	233	211	176	280	233
1.10	116	176	154	233	232	176	308	233
1.20	127	176	168	233	253	176	336	233
1.30	137	176	182	233	275	176	363	233
1.40	148	176	196	233	296	176	391	233
1.50	158	176	210	233	317	176	419	233
1.60	169	176	224	233	338	176	447	233
1.70	179	176	238	233	359	176	475	233
1.80	190	176	252	233	380	176	503	233
1.90	201	176	266	233	401	176	531	233
2.00	211	176	279	233	422	176	559	233
2.10	222	176	294	233	445	176	587	233
2.20	232	176	307	233	466	176	615	233
2.30	243	176	322	233	487	176	643	233
2.40	253	176	336	233	508	176	671	233
2.50	264	176	350	233	528	176	699	233
2.60	274	176	363	233	549	176	727	233
2.70	285	176	377	233	570	176	755	233
2.80	296	176	391	233	591	176	783	233
2.90	306	176	405	233	612	176	811	233
3.00	317	176	419	233	634	176	839	233
3.10	327	176	433	233	655	176	867	233
3.20	338	176	447	233	676	176	895	233
3.30	348	176	461	233	697	176	923	233
3.40	359	176	475	233	718	176	951	233
3.50	370	176	489	233	739	176	979	233
3.60	380	176	503	233	760	176	1007	233
3.70	391	176	517	233	781	176	1034	233
3.80	401	176	531	233	803	176	1062	233
3.90	412	176	545	233	824	176	1090	233
4.00	422	176	559	233	845	176	1118	233

The illustrations may differ from the actual version.
Subject to technical changes.

Manufactured according to the requirements of DIN EN 12737



Thye-Lokenberg Betonwerke GmbH
Erlenweg 4
D-49434 Neuenkirchen-Vörden
Phone +49 5493 - 99219-0
Fax +49 5493 - 99219-20
info@thye-lokenberg.de

Thye-Lokenberg Polska Sp. z o.o.
ul. Osiedlowa 27
PL 68-114 Tomaszowo
Phone +48 68 3606-199
Fax +48 68 3606-398
thye@thye-lokenberg.pl

www.thye-lokenberg.com