




EXCREMENT HOLE-SLATTED FLOOR FOR SOWS

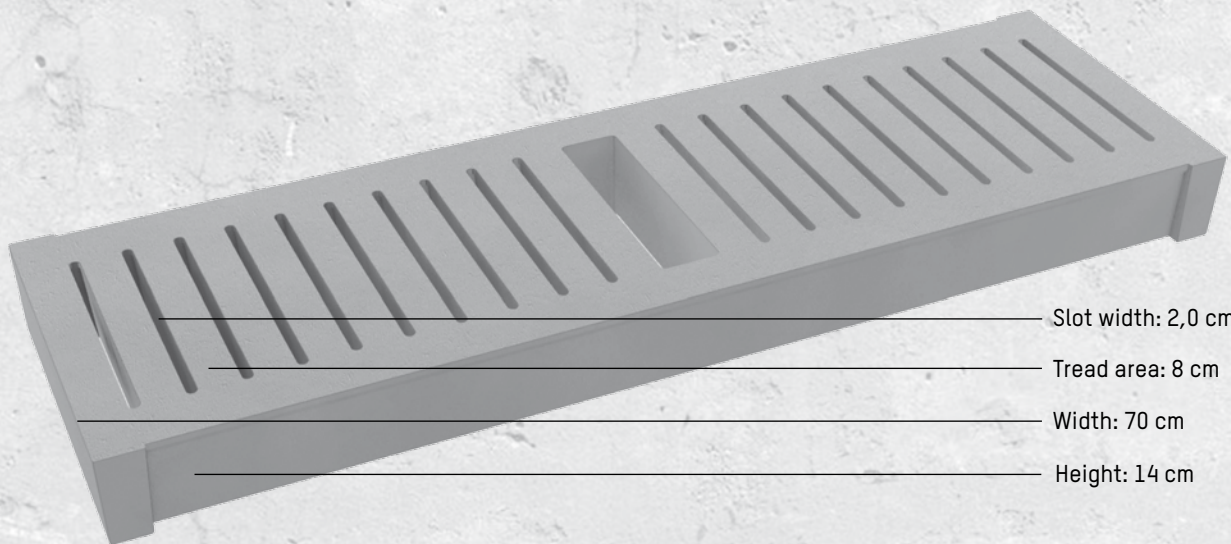

Slot width: 2,0 cm

Tread area: 8 cm

Width: 70 cm

Height: 14 cm

- ▶ More hygiene at insemination
- ▶ Animal weights up to 250 kg
- ▶ Desired excrement hole arrangement, various widths
- ▶ Good self-cleaning due to optimal excrement tear-off edge
- ▶ High maturity and stability due to animal-friendly interface
- ▶ Concrete quality: C 40/50
- ▶ Manufactured to the requirements of DIN EN 12737
- ▶ Standardly machine-deburred slot edges
- ▶ Perfect for sows in gestation crates

EXCREMENT HOLE-SLATTED FLOOR FOR SOWS


The excrement hole-slatted floor is preferably placed in gestation crates. With this excrement hole cover, slatted floor can also be used for a group of animals.

The slatted floor is available in width of 70 cm. The size of the excrement hole is manufacture by us according to your individual wishes. The excrement hole cover is available on request.

SIZES:

Lenght in m	Width in cm	Height in cm	Slot width in cm	Weight per piece in kg
1.60	70	14	2,0	175
1.70	70	14	2,0	185
1.80	70	14	2,0	195
1.90	70	14	2,0	205
2.00	70	14	2,0	215
2.10	70	14	2,0	226
2.20	70	14	2,0	237

Intermediate lengths available on request

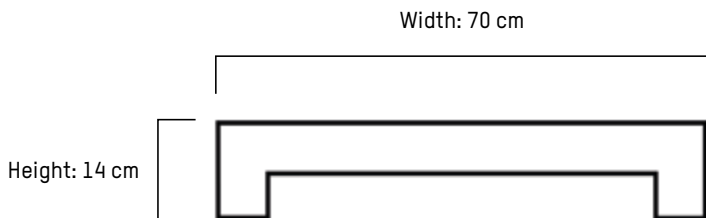

Excrement hole-slatted floor for sows in cross-section

The illustrations may differ from the actual version.
Subject to technical changes.

Manufactured according to the requirements of DIN EN 12737



Thye-Lokenberg Betonwerke GmbH
Erlenweg 4
D-49434 Neuenkirchen-Vörden
Phone +49 5493 - 99219-0
Fax +49 5493 - 99219-20
info@thye-lokenberg.de

Thye-Lokenberg Polska Sp. z o.o.
ul. Osiedlowa 27
PL 68-114 Tomaszowo
Phone +48 68 3606-199
Fax +48 68 3606-398
thye@thye-lokenberg.pl

www.thye-lokenberg.com