




MULTI GRATE

Width: 60 cm

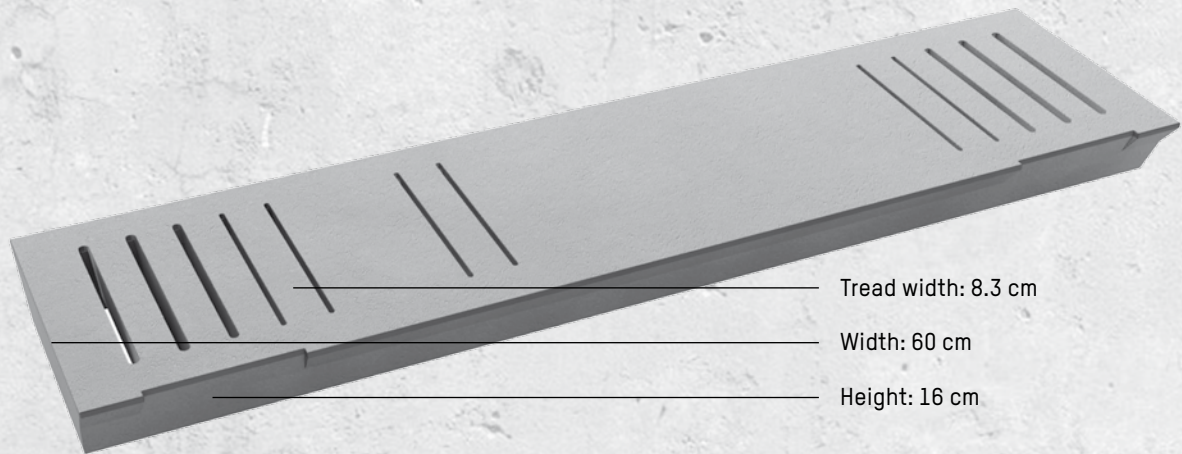

Tread width: 8.3 cm

Width: 60 cm

Height: 16 cm

- ▶ Column and tread width according to the current German „Haltungsverordnung“
- ▶ Slot widths and partially closed areas are combined
- ▶ High maturity and stability due to animal-friendly interface
- ▶ Standardly machine-deburred slot edges
- ▶ Concrete quality: C 40/50
- ▶ Manufactured according to the requirements of DIN EN 12737

MULTI GRATE

The multi grate has already proven itself on the Dutch market. It is characterized by its uniform height of 16 cm.

This multi grate is also the only floor with cross slot and extremely variable in the slot allocation.


This floor is suited in the resting area behind the trough. Because of the different regulations in our provinces, the percentage of the culvert is according to the resting area differently government-founded.

Width: 60 cm
 Length: 80 to 300 cm
 Height: 16 cm
 Cross slots: 10/18/20 mm available
 For animal weight up to 250 kg

SIZES:

Length in m	Weight in kg/piece	Weight in kg/m ²
0.8	80	166
0.9	90	166
1.0	100	166
1.1	110	166
1.2	120	166
1.3	130	166
1.4	140	166
1.5	150	166
1.6	160	166
1.7	170	166
1.8	180	166
1.9	190	166
2.0	200	166
2.1	210	166
2.2	220	166
2.3	230	166
2.4	240	166
2.5	250	166
2.6	260	166
2.7	270	166
2.8	280	166
2.9	290	166
3.0	300	166

Other lengths on request

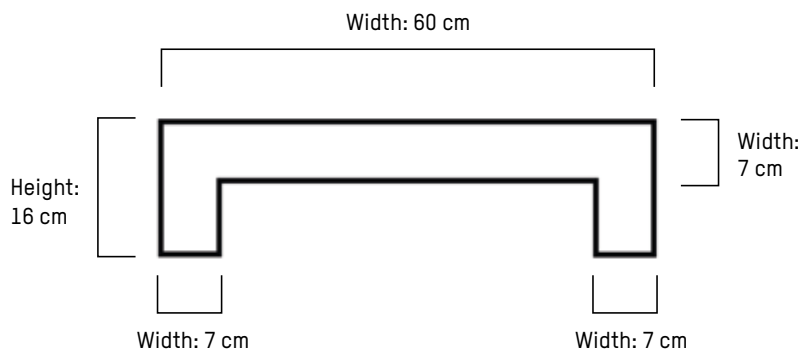

Multi grate in profile

The illustrations may differ from the actual version.
 Subject to technical changes.

Manufactured according to the requirements of DIN EN 12737



Thye-Lokenberg Betonwerke GmbH
 Erlenweg 4
 D-49434 Neuenkirchen-Vörden
 Phone +49 5493 - 99219-0
 Fax +49 5493 - 99219-20
info@thye-lokenberg.de

Thye-Lokenberg Polska Sp. z o.o.
 ul. Osiedlowa 27
 PL 68-114 Tomaszowo
 Phone +48 68 3606-199
 Fax +48 68 3606-398
thye@thye-lokenberg.pl

www.thye-lokenberg.com