




SLATTED FLOORS FOR FATTENING PIGS

Width: 120 cm

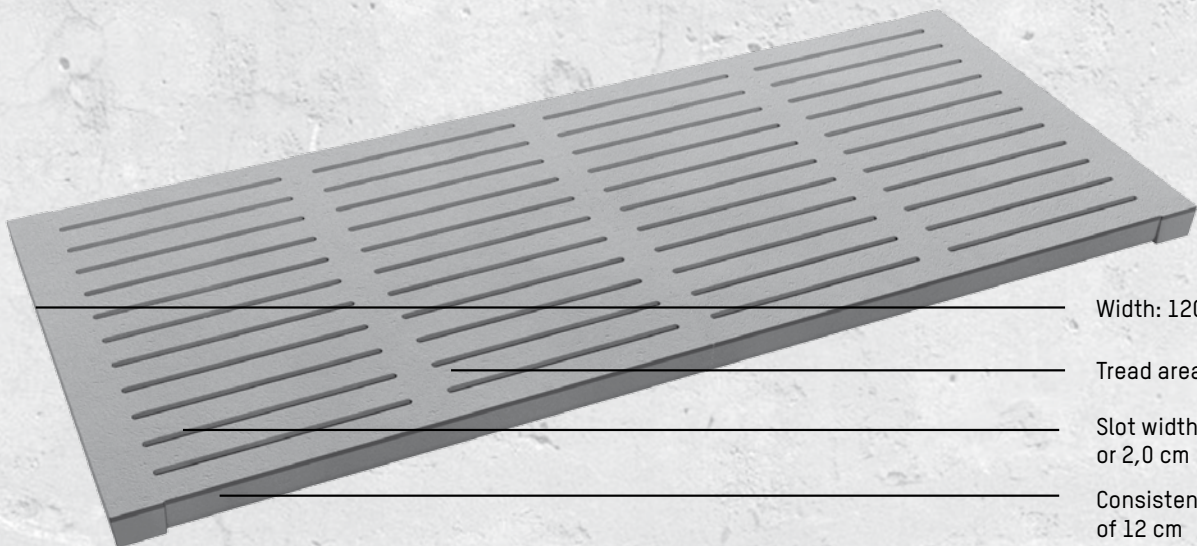

Width: 120 cm

Tread area: 8 cm

Slot width: 1,8 cm
or 2,0 cm

Consistent height
of 12 cm

- ▶ Column and tread widths according to the current German "Haltungsverordnung"
- ▶ Available in the following versions: partially closed and closed with open butt joint
- ▶ Concrete quality: C 40/50
- ▶ Manufactured according to the requirements of DIN EN 12737
- ▶ Animal weight up to 250 kg
- ▶ Bearing at least 8 cm
- ▶ Standardly machine-deburred slot edges

SLATTED FLOORS FOR FATTENING PIGS


The pig slatted floor is characterized by its standardly height of 12 cm and is perfectly combined with other slatted floors in 120 cm width.

The slot widths can be 1,8 cm and 2,0 cm. The pig slatted floor is also available as closed element with a load up to 250 kg animal weight.

SIZES:

Length	Weight in kg/piece	Weight in kg/m ²
2.6	665	213
2.7	690	213
2.8	716	213
2.9	741	213
3.0	767	213
3.1	792	213
3.2	818	213
3.3	844	213
3.4	869	213
3.5	895	213
3.6	920	213

Shorter lengths on request

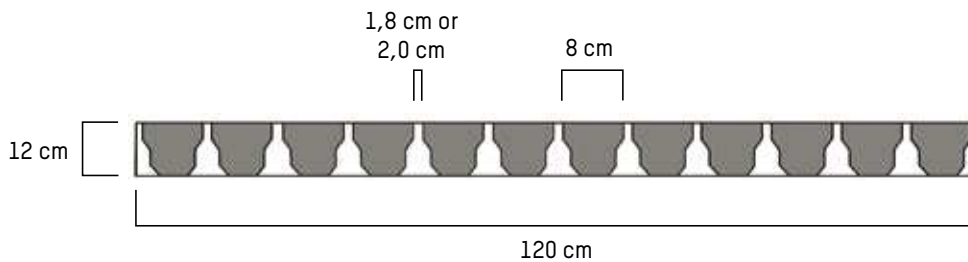

Pig slatted floor in profile

The illustrations may differ from the actual version.
Subject to technical changes.

Manufactured according to the requirements of DIN EN 12737



Thye-Lokenberg Betonwerke GmbH
Erlenweg 4
D-49434 Neuenkirchen-Vörden
Phone +49 5493 - 99219-0
Fax +49 5493 - 99219-20
info@thye-lokenberg.de

Thye-Lokenberg Polska Sp. z o.o.
ul. Osiedlowa 27
PL 68-114 Tomaszowo
Phone +48 68 3606-199
Fax +48 68 3606-398
thye@thye-lokenberg.pl

www.thye-lokenberg.com