




SLATTED FLOORS FOR FATTENING PIGS

Width: 60 cm

Also passable
possible!

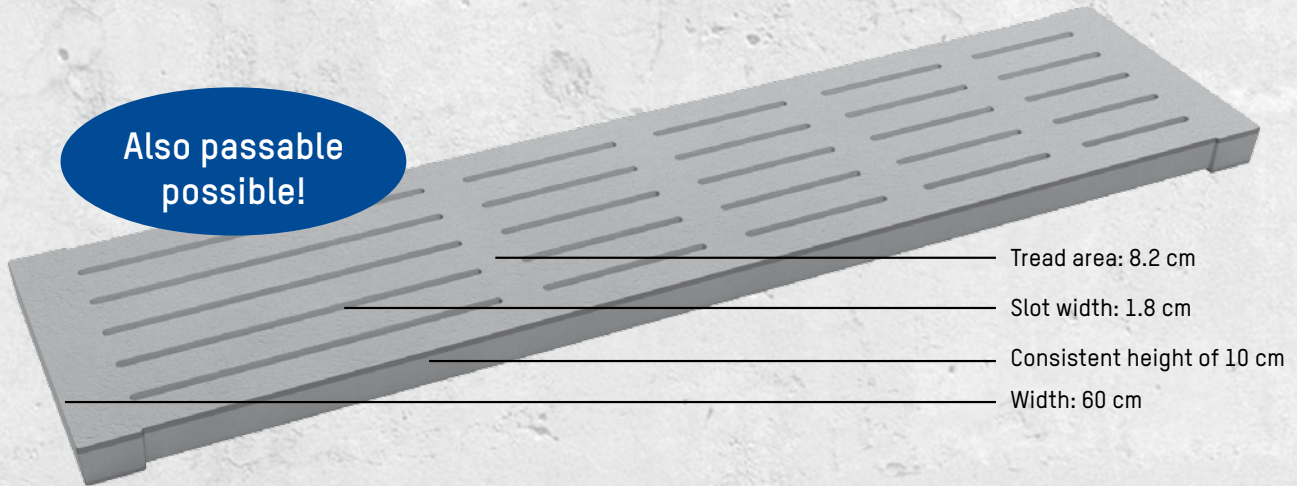

- ▶ Column and tread widths according to the current German "Haltungsverordnung"
- ▶ Available in the following versions: partially closed and closed with open butt joint
- ▶ Animal weight up to 250 kg
- ▶ Bearing at least 8 cm
- ▶ Standardly machine-deburred slot edges
- ▶ Concrete quality: C 40/50
- ▶ Manufactured according to the requirements of DIN EN 12737

SLATTED FLOORS FOR FATTENING PIGS

The pig slatted floor is characterized by its standardly height of 10 cm and is perfectly combined with other slatted floors in 120 cm width.



Animal weights up to 250 kg can load the slatted floor.

A high maturity and stability is guaranteed by the animal-friendly interface. The slot width is 1.8 cm.

The pig slatted floor has a width of 60 cm. On request it is also available with a width of 50 cm or as a closed element.

SIZES:

Length in m	Weight in kg/piece	Weight in kg/m ²
0.7	70	166
0.8	80	166
0.9	90	166
1.0	100	166
1.1	110	166
1.2	120	166
1.3	130	166
1.4	137	166
1.5	150	166
1.6	160	166
1.7	170	166
1.8	180	166
1.9	190	166
2.0	200	166
2.1	209	166
2.2	219	166
2.3	229	166
2.4	239	166
2.5	249	166

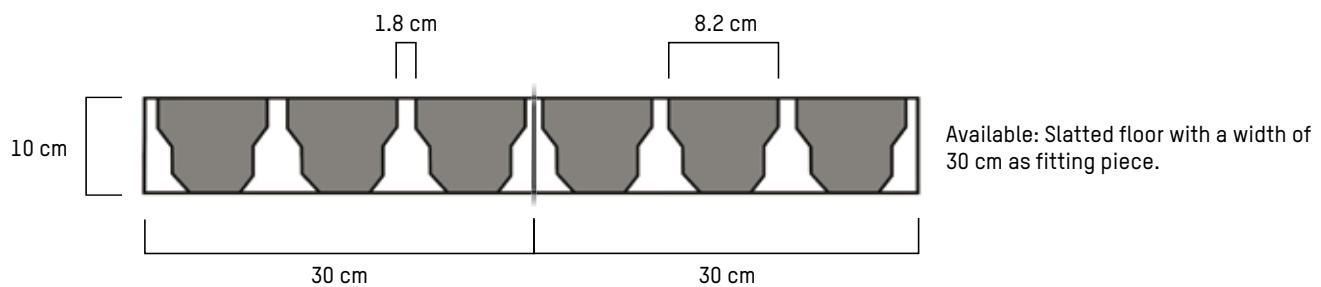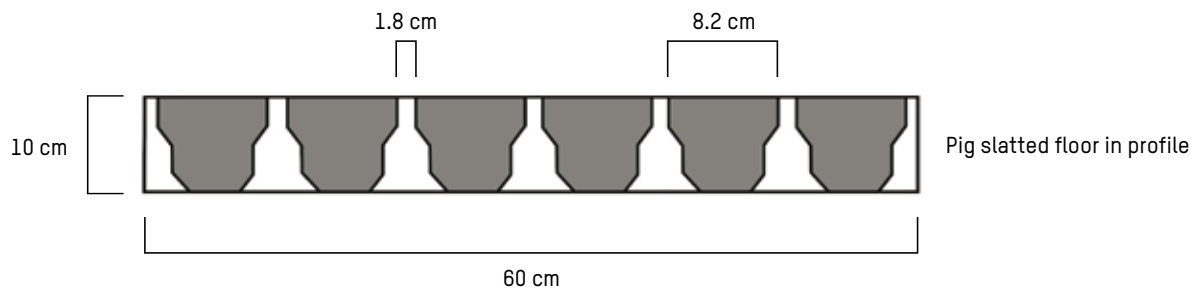

The illustrations may differ from the actual version.
Subject to technical changes.

Manufactured according to the requirements of DIN EN 12737



Thye-Lokenberg Betonwerke GmbH
Erlenweg 4
D-49434 Neuenkirchen-Vörden
Phone +49 5493 - 99219-0
Fax +49 5493 - 99219-20
info@thye-lokenberg.de

Thye-Lokenberg Polska Sp. z o.o.
ul. Osiedlowa 27
PL 68-114 Tomaszowo
Phone +48 68 3606-199
Fax +48 68 3606-398
thye@thye-lokenberg.pl

www.thye-lokenberg.com